



Omicron Style Pincer Grip Wobble Sticks

The Omicron style pincer grip wobble stick wobble stick allows for sample and tip / cantilever transfer.

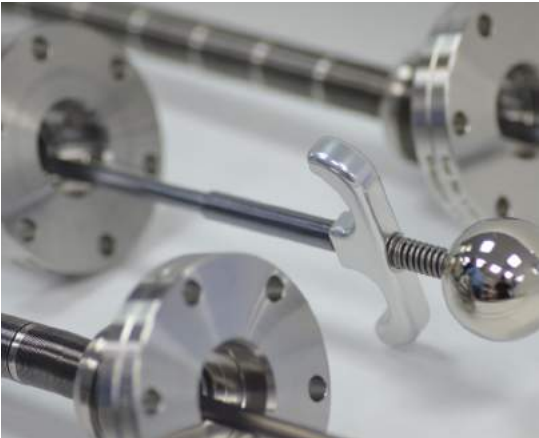

Product Overview

- For Sample / Cantilever Transfer
- Requires Extended ID for 2^{3/4} (70mm) OD Port
- Various lengths available - See table for more information
- Bakeable to 250°C
- Convenient handling

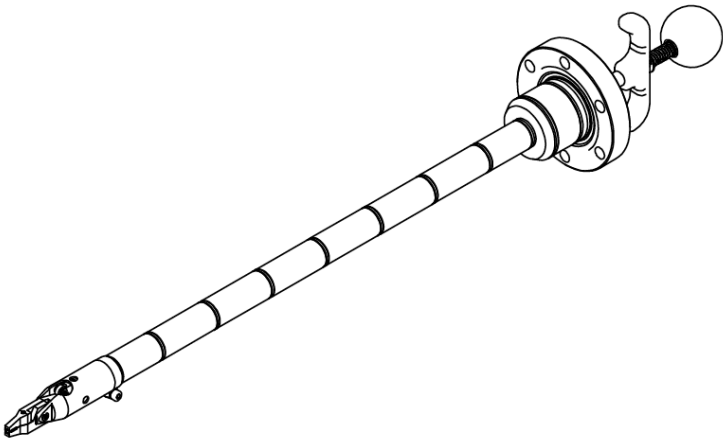

Omicron Style Pincer Grip Wobble Stick										
Flange OD		Travel	Extended ID mm (for Angular movement)	Off Axis Pincer Action	Pincer Action	In Vacuum	Ex Vacuum	Total Length	Travel	Order Code
mm	Inch	mm				mm	mm	mm	mm	
70	2.75	120	70	90° Off Axis		134 ⁽¹⁾	227 ⁽¹⁾	361 ⁽¹⁾	120 ⁽¹⁾	WS120
70	2.75	180	70	90° Off Axis		177 ⁽¹⁾	287 ⁽¹⁾	464 ⁽¹⁾	180 ⁽¹⁾	WS180
70	2.75	270	70	90° Off Axis		229 ⁽¹⁾	377 ⁽¹⁾	180 ⁽¹⁾	270 ⁽¹⁾	WS270
70	2.75	120	70		On Axis / Inline	182 ⁽²⁾	227 ⁽²⁾	409 ⁽²⁾	120 ⁽²⁾	WS120IL
70	2.75	180	70		On Axis / Inline	225 ⁽²⁾	287 ⁽²⁾	512 ⁽²⁾	180 ⁽²⁾	WS180IL
70	2.75	270	70		On Axis / Inline	277 ⁽²⁾	377 ⁽²⁾	654 ⁽²⁾	270 ⁽²⁾	WS270IL

(1) Fixed with 90° Pincer Grip. The measured distances are from mouting flange sealing side in the fully retracted position.

(2) Straight pincer grips are removable. The measured distances are from mouting flange sealing side in the fully retracted position.